

LED HIGH-BAY COMET SERIES

COMET



STANDARD COLOUR




DETAILS

- Reflector in anodized and polished aluminium clear [C] or smooth [L]
- Gear housing in die-cast aluminium
- Coated with dark grey high quality powder after chromate treatment
- M10 mounting hook
- Aluminium closing clips for quick and easy access to control gear
- Tempered glass (5 mm)
- 50.000 Lifespan
- Stainless steel hinged cover with safety retainer
- Supplied with electronic driver
- Standard version CCT 4000K Available in 3000K and 5000K
- Available with control gear on request
- IP Rate IP65

APPLICATIONS

- Production areas
- Warehouses
- Commercial areas
- Airports

LED HIGH-BAY COMET SERIES

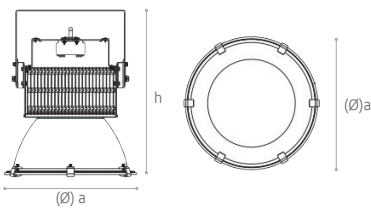

Code	(W)	Source	Beam	CCT (K)	a (mm)	h (mm)	(lm)	(Kg)
LUX-COM-GL-C-H100-4K	100	LED	90°	4000	Ø 459	367	8000	7.1
LUX-COM-GL-C-H100-5K	100	LED	90°	5000	Ø 459	367	8000	7.1
LUX-COM-GL-C-H150-4K	150	LED	90°	4000	Ø 459	367	13000	8.8
LUX-COM-GL-C-H150-5K	150	LED	90°	5000	Ø 459	367	13000	8.8
LUX-COM-GL-C-H200-4K	200	LED	90°	4000	Ø 467	367	16100	7.7
LUX-COM-GL-C-H200-5K	200	LED	90°	5000	Ø 467	367	16100	7.7

CLEAR [C] – LED – 200W

